



SBM-600MW SBM-600MB

High Resolution IR Dome Camera with 24 IR LEDs

Features

- ▶ 1/3" SONY Super HAD CCD II
- ▶ 620 TVL (Color) / 700 TVL (B/W) of Horizontal Resolution
- ▶ Minimum illumination of 0.01 Lux
- ▶ 4 Zones Privacy Masking Function
- ▶ Digital Noise Reduction for Reducing HDD Capacity
- ▶ 24 IR LEDs
- ▶ IR LED Effective Range Reaches Up to 20 Meters
- ▶ Built-in OSD (On Screen Display)
- ▶ Power Supply: DC 12V




SBM-600MW

SBM-600MB

1/3" SONY Super HAD CCD II	620 TVL (Color) 700 TVL (B/W)	0.01 Lux	20 m	4 Zones	OSD
Image Sensor	Resolution	Min. Illumination	IR LED Range	Privacy Masking	Menu

Dimensions

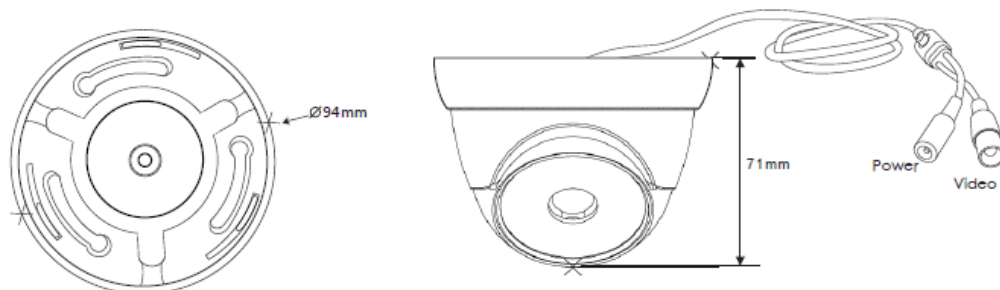

Specifications

Model	SBM-600MW	SBM-600MB
Video Standard	NTSC / PAL	
Image Sensor	1/3" SONY Super HAD CCD II	
Effective Picture Elements	NTSC: 768 (H) × 494 (V) / PAL: 752 (H) × 582 (V)	
Horizontal Resolution	620 TVL (Color) / 700 TVL (B/W)	
Min. illumination (approx.)	0.01 Lux	
IR LED	24 Units	
IR LED Effective Range	Up to 20 Meters	
Scanning System	2:1 Interlace	
Synchronizing System	Auto / Internal	
Video Out Level	1.0V (p-p) / 75Ω, Composite	
Video S/N Ratio	More than 50dB (AGC Off)	
Electrical Shutter	1/60 - 1/120,000 sec / 1/50 - 1/120,000 sec	
2D-Digital Noise Reduction (2D-DNR)	Off / Low / Middle / High	
Privacy Masking	4 Zones	
OSD Language	English / Chinese	
Power Requirement	DC 12V	
Operating Temperature	-20℃ - 60℃ / 30% - 80%	
Storage Temperature	-30℃ - 60℃ / 20% - 90%	
Shell Material	Plastic	
Shell Color	White	Black