

LKV2000

PC VGA to composite (Yellow RCA) and/or S-video





LKV2000 converts PC VGA to composite (Yellow RCA) and/or S-video TV display signal. It is with a VGA pass through so that you can keep your computer monitor connected while sending a signal to the TV. All outputs are loopthrough, display simultaneously. It is with fine tuning control to adjust the picture to your preference. It draws power from an available USB port using a supplied USB power cable. No external power supply is needed.


Features

- 1 Input: 1 X VGA;
- 3 Loop-through Outputs: 1 X VGA, 1 X Composite Video, 1 X S-video;
- PC VGA resolution: 640X480 (60/72/75/85Hz), 800X600 (60/75Hz), 1024X768 (60/75Hz). Higher resolutions are supported, while the lower the resolution is, the better the picture effect will be.
- On Screen Display (OSD);
- Plug and Play. No software driver is needed;
- Both PAL / NTSC are compatible;
- HSIZE, VSIZE, BRIGHTNESS, CONTRAST, HUE, SATURATION, SHARPNESS and OSD - BACKGROUND color are adjustable.
- It is powered by USB port of PC host. When the USB port of the PC host fails to function, a DC 5V

external power supply is optional.

-Portable Size: 98mm(L)x58mm(W)x32mm(H).

Connection Image

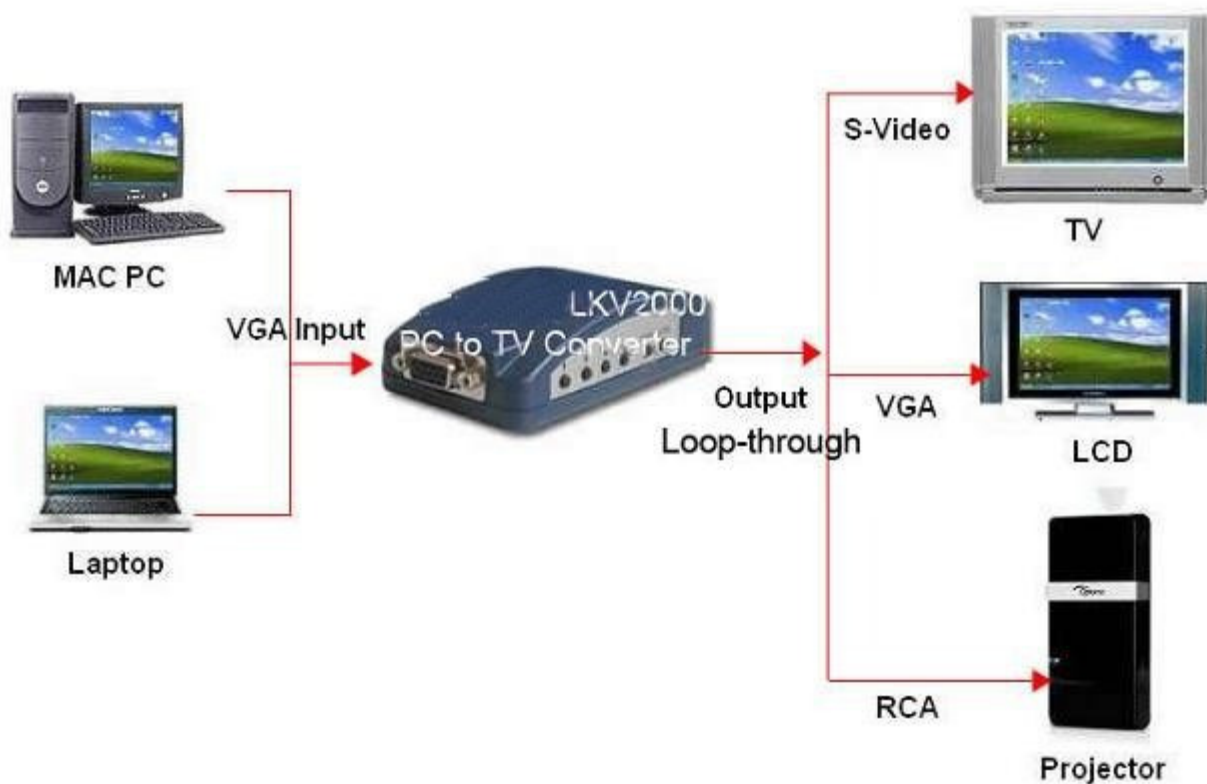

Interface Specification



(1)DC 5V: To connect PC USB port or DC 5V external power supply

(2)Video system PAL/NTSC switch.

(3)Video Out: To connect Composite Video display .

(4)S-Video Out: To connect S-Video display.

(5)VGA Out: To connect PC monitor LCD.

(6)VGA In: To connect PC Host .



(1)(2)(3)(4) up/down/left /right key: Click it to adjust the position of output picture.

(5)MENU: Click it enter into "OSD". Press it and hold on for 3 seconds to return to default setting.

(6)ZOOM: Click it to magnify the screen and click it once again to return to normal display.

Accessories & Package

Item	Qty	Pic
RCA cable	1 pcs	
S-video cable	1 pcs	
VGA cable	1 pcs	
USB cable	1 pcs	
User manual	1 pcs	
Package Box	1 pcs	